



MT55 | Mini Tracked Loaders



Mini in size – maxi in productivity!

■ Fullfilling all needs

Landscapers, entrepreneurs, rental companies, do-it-yourselfers – here is the ideal complement to your compact equipment fleet!

The MT55 is powerful, agile, fast and versatile!



■ Versatility taken to the limit!

You can use more than 15 different attachments. The MT55 digs, tills, trenches, sweeps, breaks up concrete, moves material... and much more! You will be amazed at how productive the MT55 can be on any jobsite.



Simple to operate:
One-hand steering and intuitive responsive controls make it easy to operate.

■ Ride on it or walk behind it!

- Available as a kit, the ride-on platform mounts or dismounts easily in seconds.
- Pivoting mount with trailer wheel offers a smooth ride.
- Large standing surface for comfort and convenience.

■ Performance in a smaller package

With an engine power of 17.5 kW and a load capacity of 254 kg the MT55 is the ideal machine for numerous applications, especially in landscaping and demolition. It eliminates much of the back-breaking and labour intensive work. Moreover, as a tracked machine with low ground pressure, it minimizes damage to lawns and gardens.



■ Light and easily transportable

Thanks to its narrow width of 91 cm and compact size, the MT55 allows you to work efficiently in tight spots, indoors and outdoors, all year round. It passes easily through a 1 metre wide door and you can even drive up and down steps. With an operating weight of only 1186 kg, the MT55 is also very easy to transport on a trailer.



Durability that lasts:
The MT55 is powered by a rugged, dependable Kubota liquid-cooled diesel engine for maximum performance and durability.



Adjustable steering controls:
The drive controls can be adjusted for height and tilted to suit the preference of different operators.



Versatility within reach

■ Hook it up!

Select from a wide variety of hard-working Bobcat attachments, including:



①



②



③



④



⑤



⑥



⑦



⑧



⑨



⑩



⑪



⑫

- | | |
|-----------------------------|---|
| ① Angle Broom | Sweeps dirt, debris and snow from sidewalks, driveways and warehouse floors. |
| ② Auger | Drills holes up to 91 cm in diameter fast, with plumb-line accuracy. |
| ③ Stump Grinder | Grinds down stumps from more than 80 cm above ground level to 28 cm below ground level. |
| ④ Buckets | Different types and sizes to handle a variety of jobs and materials. |
| ⑤ Combination Bucket | 5 functions in one attachment: digging, dumping, grappling, dozing and grading. |
| ⑥ Hydraulic Breaker | Breaks up asphalt, concrete and other hard surfaces. Can also break through walls. |
| ⑦ Landplane | Levels, grades and transports material; breaks up hard ground and removes sod. |
| ⑧ Pallet Forks | Handles palletized material as well as long objects, such as lumber and fence posts. |
| ⑨ Soil Conditioner | Moves material, levels mounds and smooths the ground. Handles a variety of soil preparation jobs. |
| ⑩ Tiller | Digs and loosens the soil; mixes compost and other materials into the soil. |
| ⑪ Trencher | Digs trenches up to 61 cm deep and 10 cm to 20 cm wide for utilities and drainage. |
| ⑫ Utility Blade | Can be used both for dozing soil and plowing snow. Blade angles up to 30 degrees. |



Machine Rating

Rated operating capacity	254 kg
Tipping load	732 kg
Pump capacity	45.4 l/min
System relief at quick couplers	200 bar
Travel speed, forward	5.6 km/h
Travel speed, reverse	2.3 km/h

Engine

Make / Model	Kubota / D902-E3B
Fuel / Cooling	Diesel / Liquid
Power	17.5 kW
Torque at 2600 RPM (ISO 9249)	54.2 Nm
Number of cylinders	3
Displacement	0.9 l
Fuel tank	26.5 l

Weights

Operating weight	1186 kg
------------------	---------

Controls

Vehicle steering	Direction and speed controlled by one hand lever
Loader hydraulics tilt and lift	Hand lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---


Standard Features

Auxiliary hydraulics	Parking brake
Bob-Tach™	Reverse travel stop panel
Built-in tie down and crane/lift locations	Spark arrestor muffler
Hydraulic drive train	Tilt lockout
Instrumentation	Tracks — rubber — 180 mm
Lift arm lockout with manual bypass	CE certification
Lift arm support	Warranty: 12 months or 2000 hours, whichever occurs first
Neutral start interlocks	

Options

Attachment control kit	Light kit
Catalytic exhaust purifier	Ride-on platform
Engine block heater	Shutdown kit

Dimensions

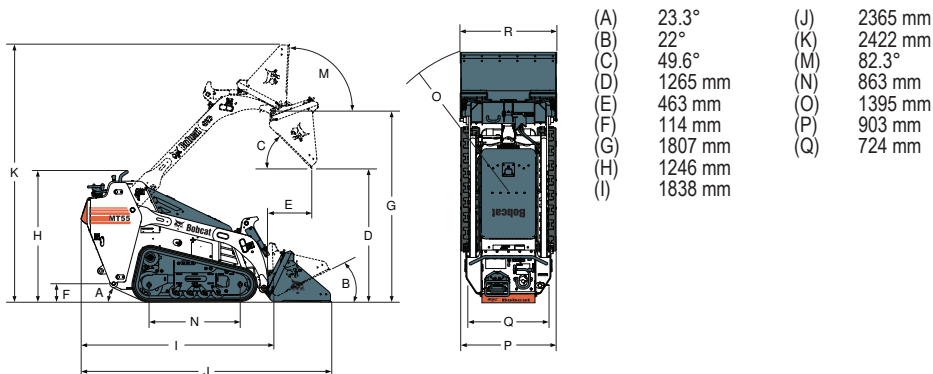

Attachments

- Angle broom
- Auger
- Bucket
- Combination bucket
- Hydraulic breaker
- Landplane
- Pallet forks
- Snow blower
- Soil conditioner
- Stump grinder
- Tiller
- Trencher
- Utility blade
- Utility forks
- Utility grapple

Specifications and design are subject to change without notice. Pictures of Bobcat products may show other than standard equipment.

www.bobcat.eu



Bobcat®

